Drawing

ALL CENTER SEAMS AND SIDE EDGES
SEALED WITH 2-INCH WIDE TAPE AND
A MINIMUM 2-INCH OVERLAP WITH THE
MANUFACTURER'S JOINT ALSO TAPED (6)

ALL SIXTEEN CANS ARE EVENLY SPACED,
WITH 1-1/2 INCHES SEPERATING THE
CANS FROM THE BOX TOP & BOTTOM

LINER IS ROLLED DOWN THEN TAPED ACROSS
THE FOLD, THE ENDS ARE FOLDED IN AND TAPED
DIAGONALLY WITH TWO STRIPS OF 2-INCH WIDE
PRESSURE-SENSITIVE TAPE. (6)

LINER IS ROLLED DOWN THEN TAPED ACROSS
THE FOLD, THE ENDS ARE FOLDED IN AND TAPED
DIAGONALLY WITH TWO STRIPS OF 2-INCH WIDE
PRESSURE-SENSITIVE TAPE. (6)

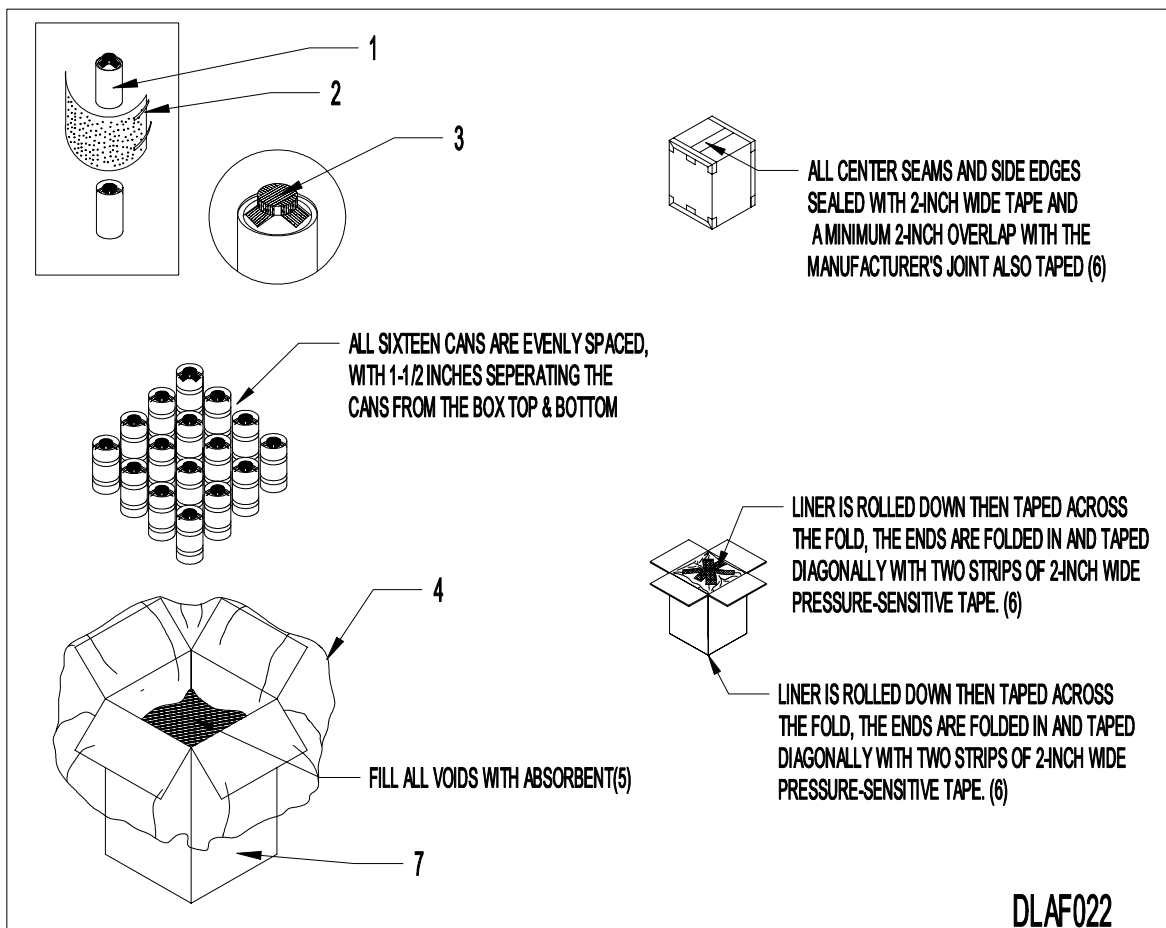FILL ALL VOIDS WITH ABSORBENT(5)

DLAF022

ITEM	DESCRIPTION
1	CAN, ROUND, AEROSOL SPRAY WITH PLASTIC CAP, 500 ml (19 oz), QTY. 16
2	1/4 INCH, POLY FOAM WRAP, APPLIED TO THE CIRCUMFERENCE OF CAN AND TAPED, QTY. 16
3	1-INCH WIDE, PRESSURE-SENSITIVE TAPE, FILAMENT-REINFORCED, IAW ASTM D5330, TY II
4	THE BOX MUST HAVE A PLASTIC LINER, 4-MIL POLYETHYLENE, 30 X 30 X 4 INCHES, BAG (REQUIRED)
5	CELLULOSE FIBER ABSORBENT, OR VERMICULITE, A-A-52450
6	2 INCH, CLEAR PACKAGING TAPE, CONFORMING TO C.I.D. A-A-1830
7	12 X 12 X 12 INCH, WEATHER-RESISTANT FIBERBOARD BOX, STYLE RSC, V3c, QTY. 1